

THE SOLID FACTS ON CHRISTCHURCH LIQUEFACTION

WHAT IS LIQUEFACTION?

Liquefaction (pronounced "lick-wi-fack-shin") happens during earthquakes. The ground shaking that occurs during an earthquake can cause some soils to liquify. This means that during an earthquake these soils will behave more like a liquid than a solid...

HOW DOES LIQUEFACTION HAPPEN?

When the ground shakes during an earthquake the soil particles are rearranged and the soil mass compacts and decreases in volume. This decrease in volume causes water to be ejected to the ground surface.

Sand volcanoes or sand boils, water fountains and associated ground surface cracking are evidence that liquefaction has occurred.





WHAT ARE THE EFFECTS OF LIQUEFACTION?

Liquefaction causes damage to the ground. Because the soil mass decreases in volume as a result of liquefaction, the ground surface may subside. Uniform subsidence over large areas may go unnoticed. Differential subsidence, particularly where there are buildings and other infrastructures, can be very obvious because of the variation in damage to those structures.

Lateral spread of the ground can also occur. Lateral spread is when blocks of land move sideways. This is most common near rivers, streams, lakes and coastal areas.

Flow failures (displacement of large masses of soil laterally for tens of metres and sometimes kilometres) and loss of soil strength are two other significant effects of liquefaction.

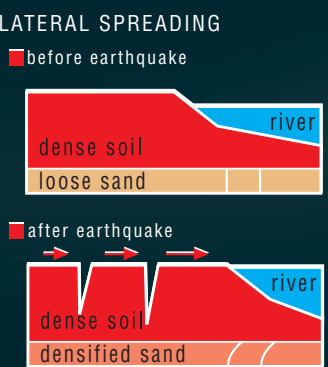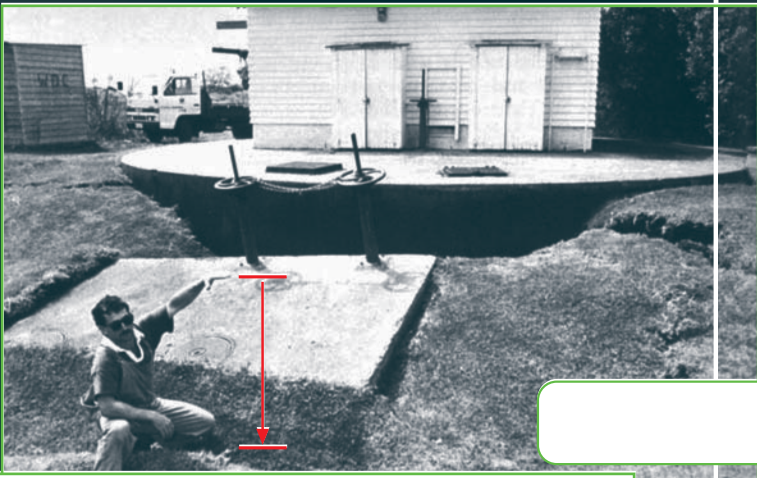


WHAT TYPES OF SOILS ARE MOST LIKELY TO LIQUEFY?

Liquefaction does not occur at random, but is restricted to certain depositional environments. Young (less than 10,000 years old) marine sediments, estuary deposits, some river channel and floodplain deposits, and poorly compacted man-made fills are the most common soils to liquify. The soils in these environments are predominantly sandy and silty soils. For liquefaction to occur, the soils must be loose (unconsolidated) and saturated (be below the water table).

are the most common soils to liquify. The soils in these environments are predominantly sandy and silty soils. For liquefaction to occur, the soils must be loose (unconsolidated) and saturated (be below the water table).

WHAT SORT OF DAMAGE MAY OCCUR TO STRUCTURES IN AREAS THAT LIQUEFY?

Loss of soil strength can cause large buildings and other structures to sink into the ground, tilt, topple over or partly collapse. Where there is differential subsidence, foundations of small buildings may crack and settle, causing deformation of the structure and cracking of walls.

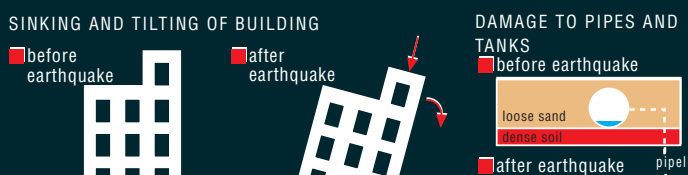

Buried structures such as large pipes, tanks and manholes can become buoyant and float to the ground surface. Pipes are likely to be damaged. Other buried services are often damaged at the transition from a liquefied soil into a non-liquefied soil.



REMARKABLE FISSURES IN THE EARTH

"At Kaiapoi, when the shock had passed...his land was apparently flooding from springs having been opened. It was then discovered that across his land... fissures from 1in to 3in [25 to 75mm] in width, and several chains [40m] in length had opened. From these earthquake openings the water was freely issuing... a liberal supply of sand from some grey quicksand layer below the level of the river, and this was deposited... in the shape of round and oval porridge pots and little hills."

"On the opposite side of the Waimakariri... a crack is traceable out of the river 2ft [600mm] in width on to the river bed... where one of the fissures is 5in [120mm] wide, and has, like many smaller cracks of the earth, been filled with quicksand blowing up... A rod several feet long was inserted in the sand, but was not long enough to test the exact depth of the ooze, though it is surmised to have come up from 20ft to 25ft [6 to 7.5m]."

Evidence that Liquefaction occurred in Kaiapoi during the Cheviot Earthquake in 1901. (The Press 18 November 1901).

"The fissures remained open, and could be probed to a depth of six feet [2m]."

- Liquefaction itself may not be particularly damaging or hazardous. When accompanied by significant ground damage, it is potentially damaging or destructive to the built environment.
- Liquefaction is only one of the effects of an earthquake such as ground shaking strength must be considered to obtain a complete picture of earthquake hazard.
- There is no certainty that liquefaction will occur at a particular site due to an earthquake of any magnitude.
- There is limited soils' information for parts of Christchurch. Therefore the potential for liquefaction and associated ground damage may be under or over estimated.
- The boundaries between the mapped liquefaction potential and damage zones are approximate and indicative only.
- The liquefaction potential and ground damage potential classifications are indicative only, and do not imply any level of damage to any particular structure, service or other infrastructure.
- The liquefaction hazard information is regional in scope and cannot be substituted for a site-specific investigation. Further advice on the liquefaction hazard at a specific site, the effects on existing or proposed development, and options for mitigating risk may be sought from specialist geotechnical engineers.

DOES LIQUEFACTION HAPPEN IN ALL EARTHQUAKES?

No. Strong ground shaking is required for liquefaction to occur. Liquefaction may occur at Modified Mercalli Intensity 7 (MM7). The MMI scale (1 to 10) is a measure of how strong ground shaking is at a specific location. At MM7 there is general alarm, it is difficult to remain standing, large bells will ring, furniture will move and un-reinforced masonry buildings will crack.


MODIFIED MERCALLI INTENSITY SCALE

The Modified Mercalli Intensity scale (MM scale) is not the same as magnitude. The MM scale is based on observations of the effects on people, objects (such as furniture and crockery), buildings and other structures, and the physical environment, including lakes, sea, and slopes. The effects vary with distance from the earthquake's epicentre, with the greatest damage usually occurring closest to the epicentre. A line called an isoseismal encloses areas of equal intensity of shaking, but actual recorded at any particular location may vary depending on topographic, geologic and soil conditions. On the isoseismal maps for two historic earthquakes in Canterbury, one predicted earthquake scenario.

An abbreviated version of the MM scale is given below.

5	Generally felt outside. Most sleepers awakened. Small unstable objects move, some glassware and crockery broken.
6	Felt by all. Difficulty in walking steadily. Objects fall from shelves. Slight damage to badly-constructed buildings.
7	General alarm. Difficulty in standing. Some damage to buildings not designed to withstand earthquakes. Furniture moves. Un-reinforced chimneys, roofing tiles and water tanks break.
8	Alarm may approach panic. Steering of motorcars greatly affected. Some damage to earthquake-resistant buildings. Serious damage to less well-designed building types. Monuments and elevated tanks brought down.
9	Heavy damage to buildings and bridges. Houses not secured to foundations shifted off. Landslides widespread on steep slopes. Cracking of ground conspicuous.
10	Severe damage to many buildings and bridges, even those of most recent design.



Source: Atwell, R. and Tabor, J. (1999). Copyright in the Crown.

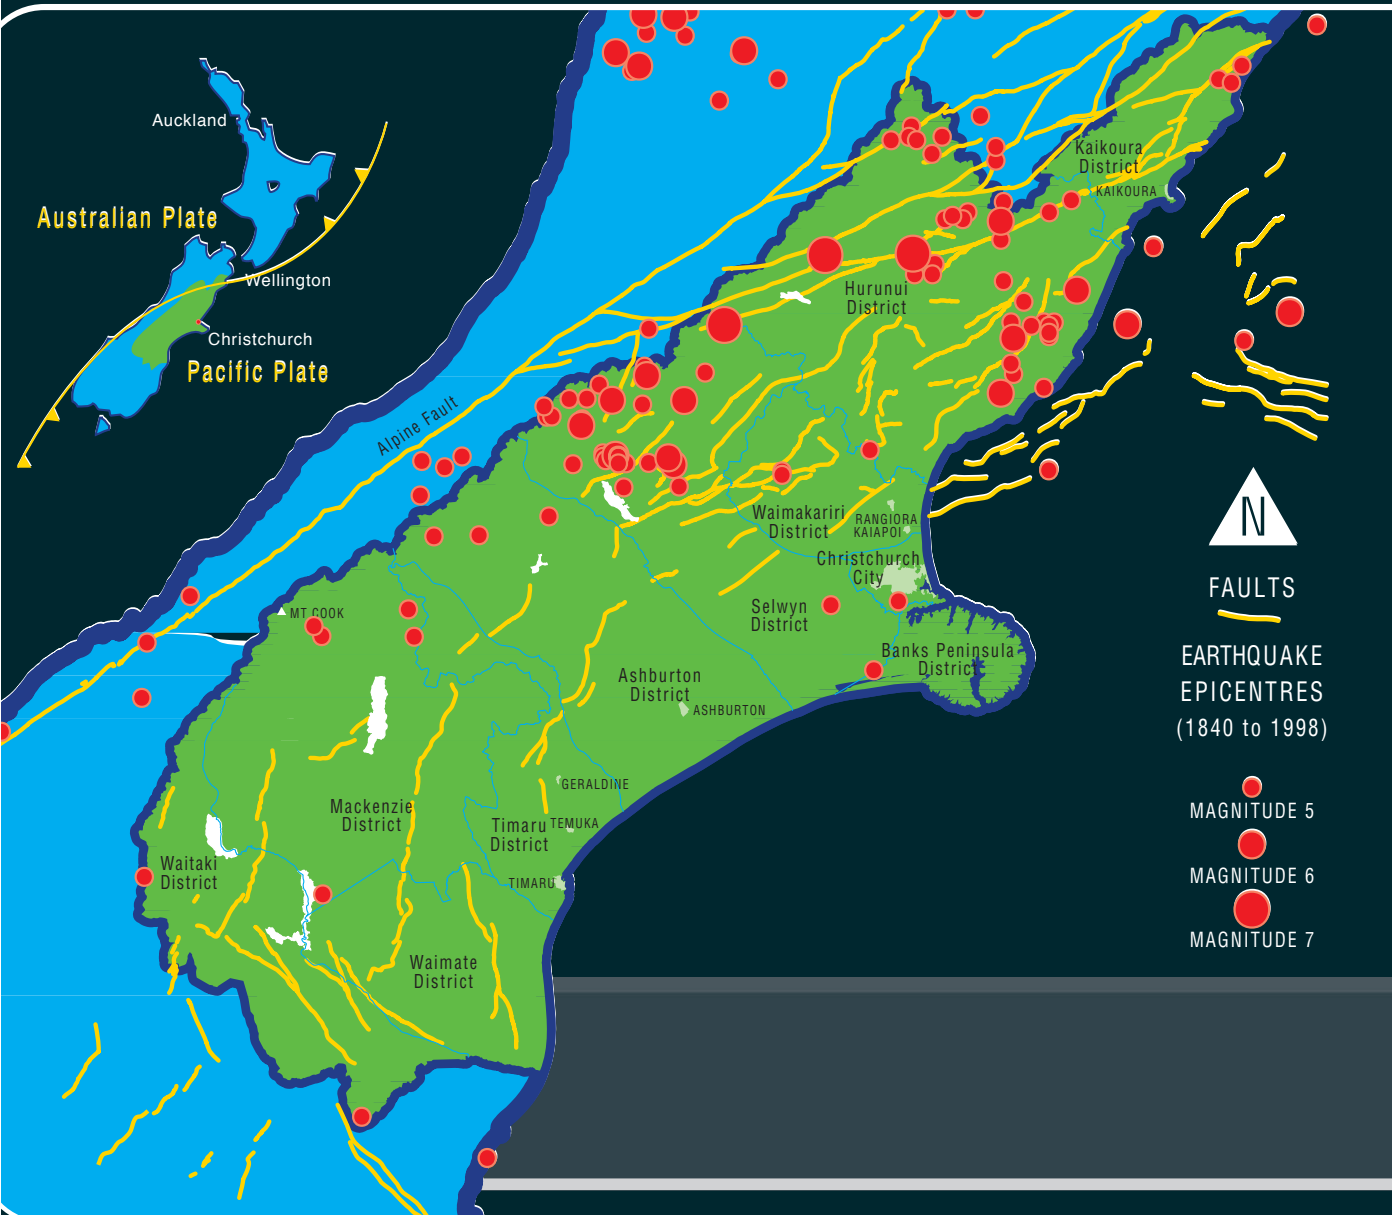



NEW ZEALAND'S TECTONIC SETTING

New Zealand is on the boundary of two of the earth's plates, the Australian Plate to the west and the Pacific Plate to the east. These plates are moving against each other and, because of this, New Zealand is a highly-active earthquake zone.

The earthquake hazard is even more extreme for Canterbury because of the Alpine Fault. It is the "on-land" boundary of the Australian and Pacific Plates, and is New Zealand's largest active fault, running under the Southern Alps for over 500km.

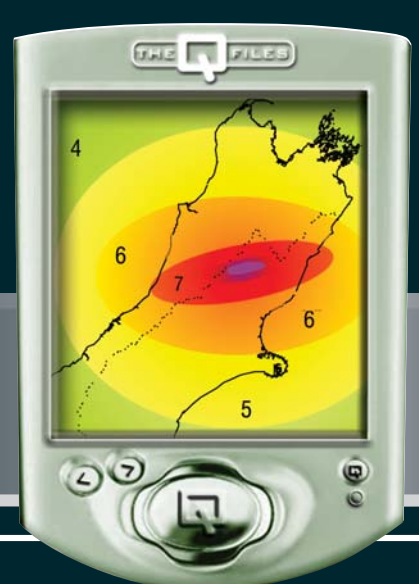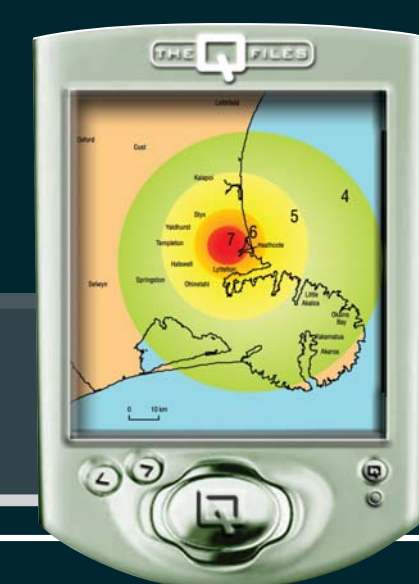

EARTHQUAKE MAGNITUDE

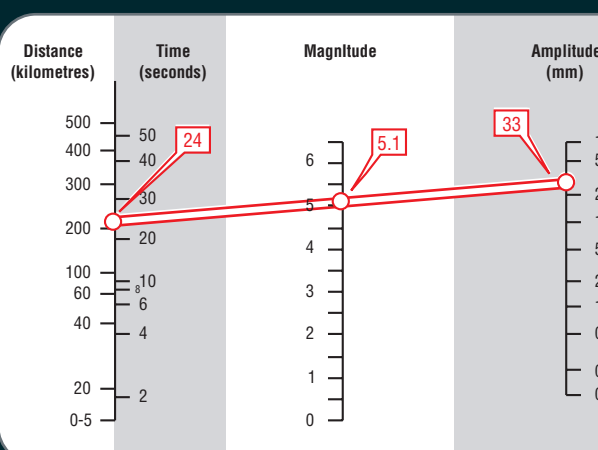

Because of the huge range in earthquake sizes, the magnitude scale, based on ground displacement, is logarithmic. For each step in magnitude, the energy released goes up 32 times. Therefore, a magnitude 7.5 is 2.8 times larger than a magnitude 7.2 earthquake, and a magnitude 8 earthquake releases almost one million times more energy than a magnitude 4 earthquake.


The most probable ground shaking intensities for a magnitude 8 earthquake on the Alpine Fault, which is the largest earthquake likely to occur on faults close to Canterbury.

LOW GROUNDWATER TABLE LIQUEFACTION POTENTIAL HAZARD MAP


HOW DO WE ASSESS THE CHANCE OF LIQUEFACTION HAPPENING?

There are five main factors used to assess the likelihood that soils will liquify. These are the strength of ground shaking, duration of shaking, depth to the water table, soil properties (grain size and density), and confining pressures. The liquefaction potential in any part of Christchurch is very dependent on the height of the groundwater table at the time of the earthquake.

The water table level varies across Christchurch, and also varies considerably during the year and from year to year. The high groundwater table liquefaction potential hazard map (B) represents average to high groundwater conditions. The low groundwater table liquefaction potential hazard map (A) is based on January averages for the last ten years.

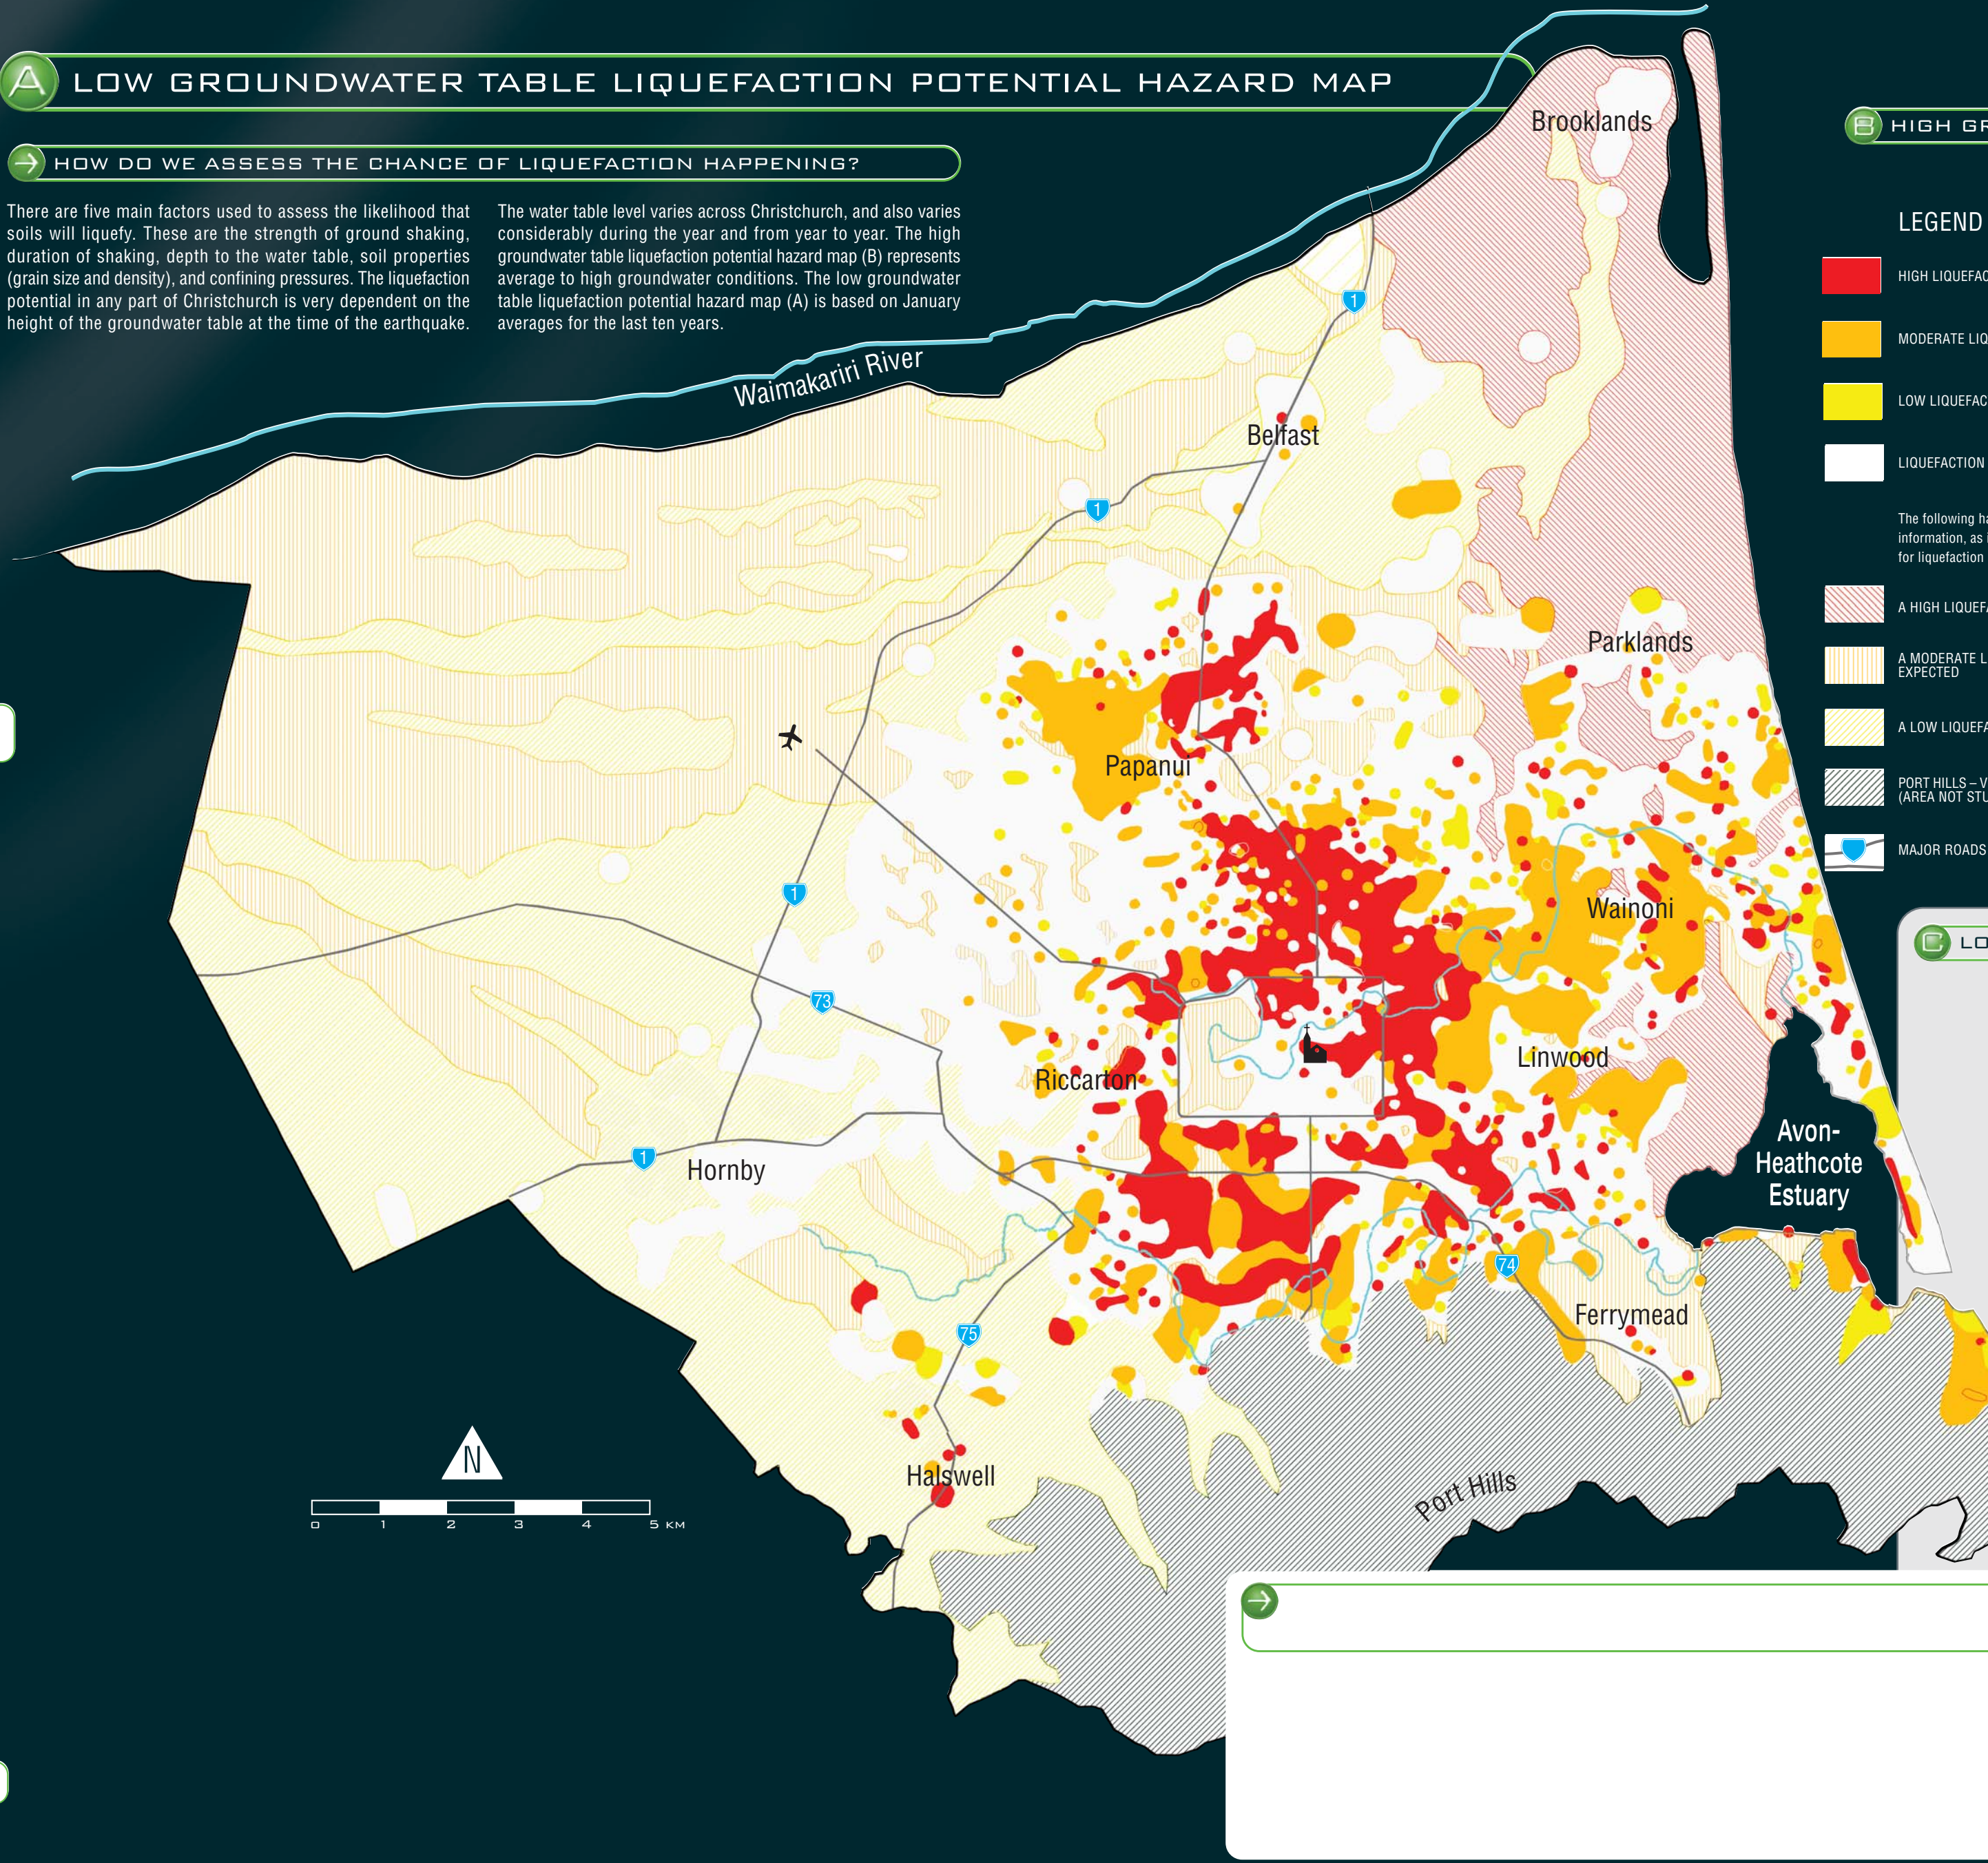

HIGH GROUNDWATER TABLE LIQUEFACTION POTENTIAL HAZARD MAP

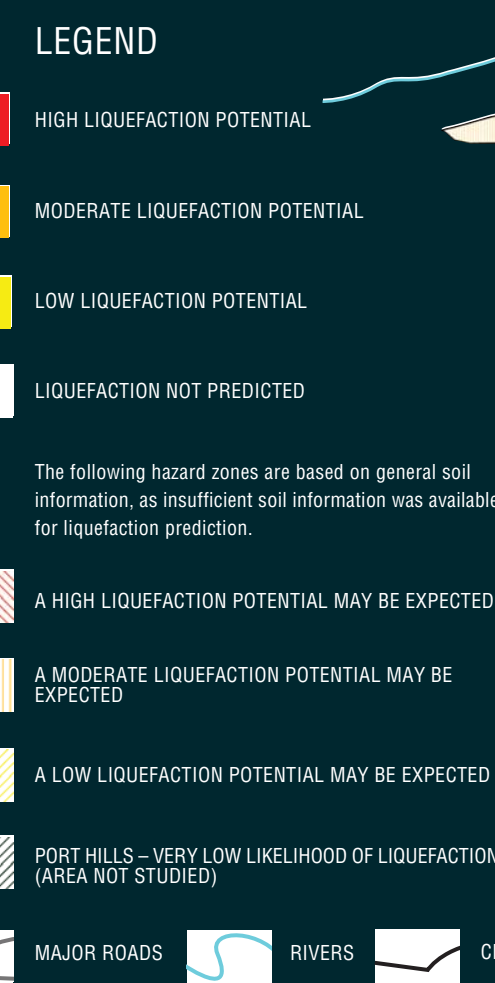

LIQUEFACTION POTENTIAL

The liquefaction potential rating is based on soil type and strength, groundwater level, and the location and strength of earthquakes. There are four classes of liquefaction potential - High, Moderate, Low and Liquefaction Not Predicted.


HIGH LIQUEFACTION POTENTIAL
Areas of Christchurch rated as having "high liquefaction potential" have soil types and strengths that are the most prone to liquefaction. Three types of earthquakes could cause liquefaction in these areas. These are a local earthquake, a foothills' earthquake and an Alpine Fault earthquake.

MODERATE LIQUEFACTION POTENTIAL
Areas of Christchurch rated as having "moderate liquefaction potential" have soil types and strengths in between the High and Low classes. Two earthquake types could cause liquefaction in these areas - a foothills' earthquake and an Alpine Fault earthquake.

LOW LIQUEFACTION POTENTIAL
Areas of Christchurch rated as having "low liquefaction potential" have soil types and strengths that are the least prone to liquefaction. Only an Alpine Fault earthquake could cause liquefaction in these areas.

LIQUEFACTION NOT PREDICTED
Areas of Christchurch rated as "liquefaction not predicted" are areas where expected ground shaking intensities are unlikely to cause liquefaction. These areas may contain liquefiable soils or could be subject to settlement or ground fissuring as a result of ground shaking itself, and not liquefaction.

LOW GROUNDWATER TABLE LIQUEFACTION GROUND DAMAGE MAP

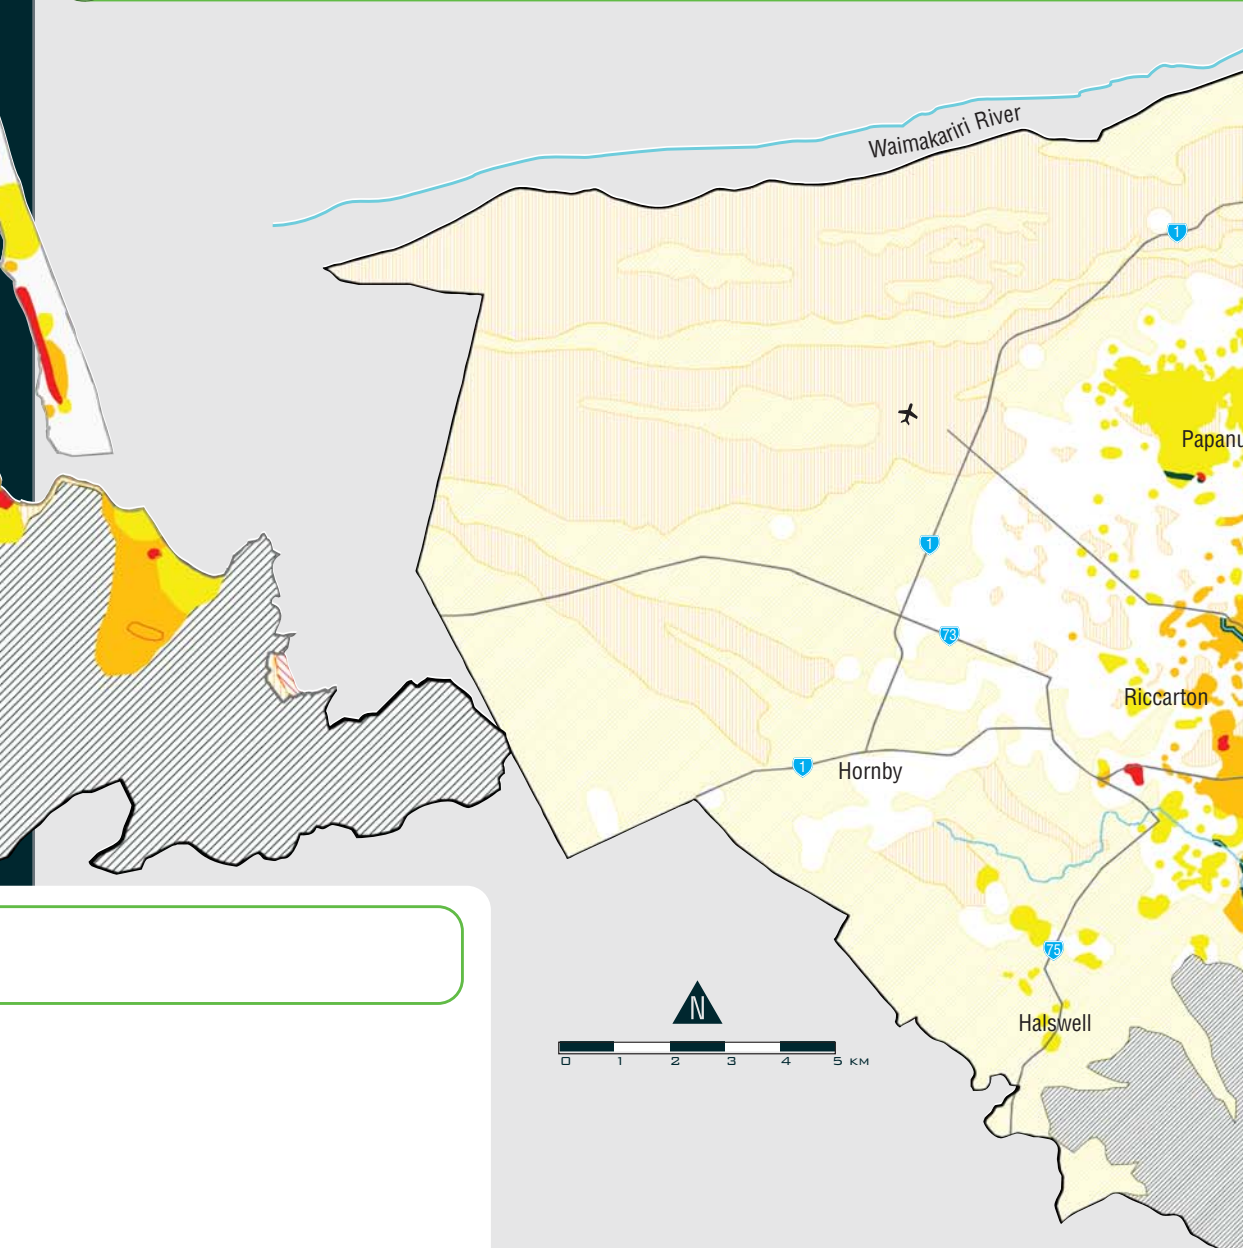

LIQUEFACTION GROUND DAMAGE POTENTIAL

Five classes of liquefaction ground damage potential have been defined for Christchurch - Very High, High, Moderate, Low and No Liquefaction.

VERY HIGH LIQUEFACTION GROUND DAMAGE POTENTIAL
Areas of Christchurch rated as having "very high liquefaction ground damage potential" may be affected by lateral spreading and significant ground subsidence. Subsidence is likely to be greater than 300mm.

HIGH LIQUEFACTION GROUND DAMAGE POTENTIAL
Areas of Christchurch rated as having "high liquefaction ground damage potential" may be affected by significant ground subsidence. Subsidence is likely to be greater than 300mm.

MODERATE LIQUEFACTION GROUND DAMAGE POTENTIAL
Areas of Christchurch rated as having "moderate liquefaction ground damage potential" may be affected by 100-300mm of subsidence.

LOW LIQUEFACTION GROUND DAMAGE POTENTIAL
Areas of Christchurch rated as having "low liquefaction ground damage potential" may be affected by up to 100mm of ground subsidence.

NO LIQUEFACTION GROUND DAMAGE POTENTIAL
Areas of Christchurch rated as having "no liquefaction ground damage potential" are those areas where liquefaction is not expected to occur.

WHAT CAN BE DONE TO REDUCE THE IMPACT OF LIQUEFACTION?

There are three main ways to reduce the effects of liquefaction - by stabilising the ground, by specific foundation design or by strengthening structures to resist predicted ground movements.

There are various methods available to stabilise a soil. These methods generally increase the density of the soil thereby increasing the resistance of the soil to liquefaction. Most of the methods are expensive and would be uneconomic for residential structures.

De-watering (drainage) and buttressing of lateral spread zones are other ground stabilisation techniques.

Specific foundation designs reduce the likelihood of damage to the foundation and deformation of the structure. Stronger foundations, deep piles and piling to non-liquefiable soil layers are the more common methods used to reduce the effect of liquefaction on structures.

MITIGATION WORK CARRIED OUT IN CHRISTCHURCH

CHRISTCHURCH WASTEWATER PLANT

Vibro-compaction of the soil. The vibrations are liquefying the soil forming a denser soil structure that will be more resistant to liquefaction. Note how water has been ejected to the surface as the soil mass compacts and decreases in volume.

OPAWA ROAD BRIDGE

Installation of concrete piles through liquefiable layers. The piles will resist liquefaction-induced lateral spread (sideways movement) of blocks of land toward the river) and reduce damage to the bridge substructure.



JADE STADIUM

To reduce the potential for liquefaction-induced ground damage, an extensive network of stone columns was placed beneath the Paul Kelly Motor Company Stand at Jade Stadium. The stone columns are 600mm in diameter and about 1.4 to 1.7m apart. The stone columns, extending to a depth of 8 to 10m and covering an area of 12,500m², improve the strength and stiffness of the soil, as well as providing a path for the excess pore water during liquefaction.

